AR-Slim Line_{MC}

AR-Slim Line

Datasheet

AR-Slim Line MC linear luminaire series offer simple and stylish illumination on different architectural structures with wide color options. They provide homogeneous image with custom made diffuser.

Practical and simple architectural illumination can be achieved with this fixed color luminaire series. MC family is designed to operate hassle-free for many years under harsh environmental conditions.



Control

External DMX512/RDM External DALI ON/OFF



General Specifications

AR-Slim Line

With its aluminum extrusion body and UV-resistant diffuser, it is designed to operate smoothly for many years under harsh environmental conditions.

With IP67 protection class feature, they work flawlessly under harsh weather conditions.

They provide visual harmony to architectural structures with body color options.

Due to external DMX512 protocol support, it provides full compatibility with external control software such as Madrix 5, ENTTEC ELM.





Technical Specifications

AR-Slim Line

General

Control Color Depth External DMX512/RDM 256

Physical

Size Body Connections Working Temperature Protection Class

45/64" x 19/32" Aluminum Extrusion IP67 Connector -13 °F ~ 122°F IP67

* Product lengths may vary. For details, see the technical drawing section.

1250lm*

140°

Optical

Luminous Flux Viewing Angle

* Lumen value is given when all LEDs are at full power.

Electrical

Power	10W*
Operating Voltage	24VDC


* Power consumption may vary with product length and pixel structure.



www.arventlight.com

Technical Drawing

AR-Slim Line

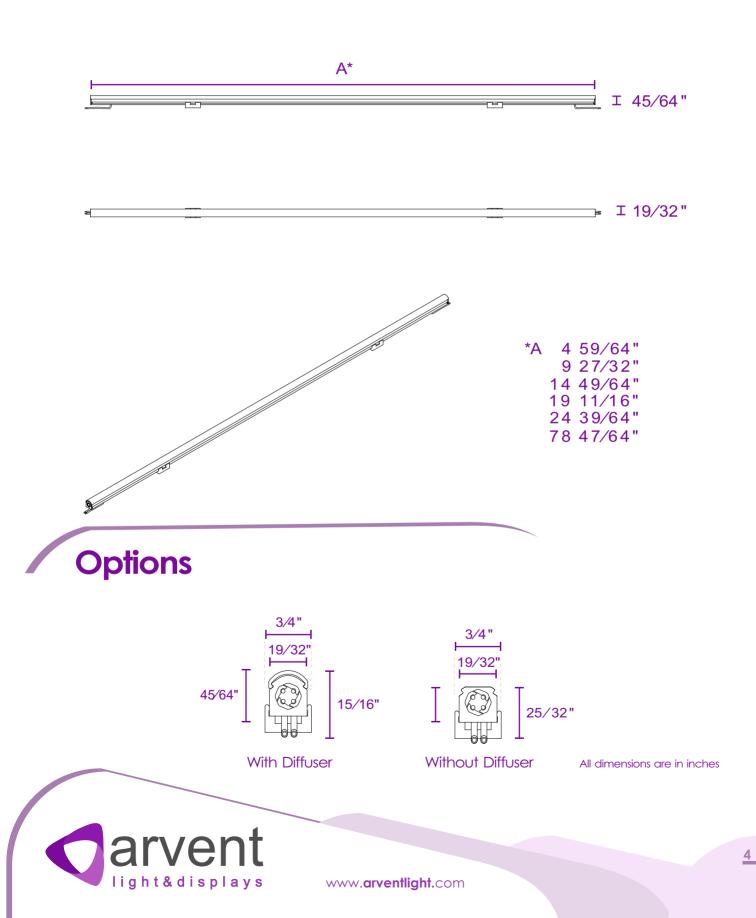

Accessories

AR-Slim Line

Connection Accessories





Extension cable

Input cable

Mounting Accessories



Standard mounting bracket



M4 Allen Key



Connection Diagram

AR-Slim Line

