

Twin X DALI/ON-OFF

Twin X DALI/ON-OFF

Datasheet

Twin X series luminaires deliver stunning performances from an extremely compact body. Perfectly meeting the demanding needs of the most creative architectural lighting spaces, these flexible and versatile luminaires are available in a variety of optical configurations and body finishes.

They offer effective lighting performances in various architectural structures with LED color options. They provide control feasibility with the built-in DALI driver option.

Options

CCT

2700K, 3000K
4000K, 5000K
6500K

Control

ON/OFF
DALI



General Specifications

Twin X DALI/ON-OFF

With its aluminum extrusion body and tempered glass, it is designed to operate smoothly for many years under harsh environmental conditions.

It has universal operating voltage of 110/220VAC.

Control feasibility with the built-in DALI driver option.

CCT options from 2700K to 6500K.

It provides visual harmony to architectural structures with its body color options.

It allows versatile use with its compact structure and high efficiency LEDs.

It is compatible with various architectural structures with its wide lens options



Technical Specifications

Twin X DALI/ON-OFF

General

Control	DALI or ON-OFF
Color Depth	256

Physical

Size	2 23/64" x 2 61/64"
Body	Aluminum Extrusion
Connections	IP67 Connector
Working Temperature	-13 °F ~ 122°F
Protection Class	IP67

* Product lengths may vary. For details, see the technical drawing section.

Optical

Luminous Flux	(*) 2160lm, 4320lm, 6480lm, 8640lm
Beam Angle	10°, 25°, 45°, 60°, 10°x35°, 10°x60°

* Lumen values are given for Wash X 030, Wash X 060, Wash X 090 and Wash X 120, respectively.

Electrical


Power	(*) 18W, 36W, 54W, 72W
Operating Voltage	110/220VAC

Effective solution for historical building lighting with shades of white color


Technical Drawing

Twin X DALI/ON-OFF


Twin X 030

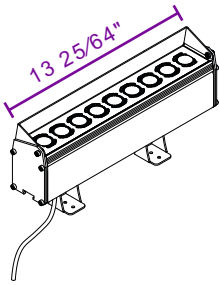


Twin X 060

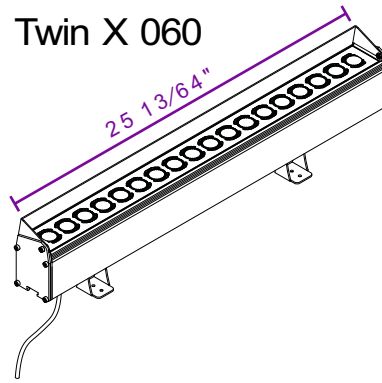


Twin X 090

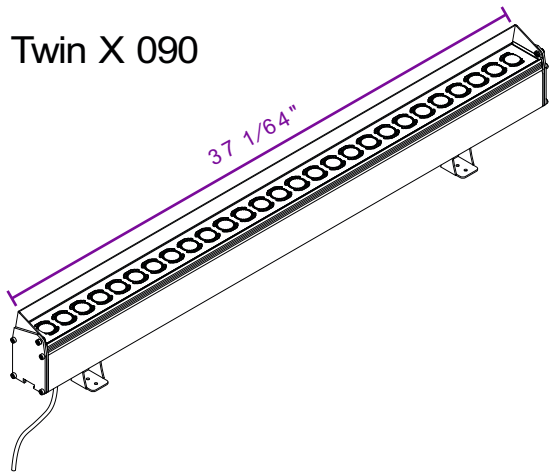


Twin X 120

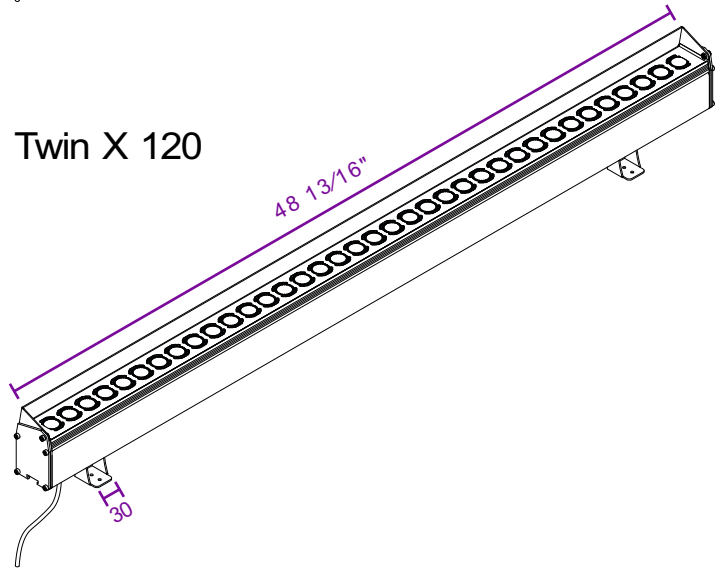

Options

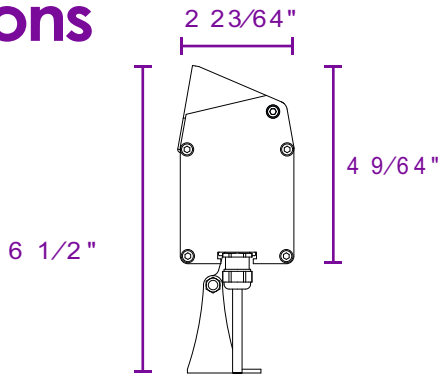

With antiglare

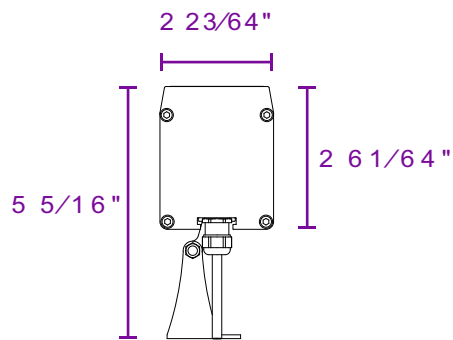

Without antiglare

All dimensions are in inches

Accessories

Twin X DALI/ON-OFF

Connection Accessories



Extension cable



Input cable

Mounting Accessories



Mounting bracket



Socket Pliers



M4 Allen Key

Connection Diagram

Twin X DALI/ON-OFF

