

Twin M DALI/ON-OFF

Twin M DALI/ON-OFF

Datasheet

Twin M series luminaires deliver stunning performances from an extremely compact body. Perfectly meeting the demanding needs of the most creative architectural lighting spaces, these flexible and versatile luminaires are available in a variety of optical configurations and body finishes.

They offer effective lighting performances in various architectural structures with LED color options. They provide control feasibility with the built-in DALI driver option.

Options

CCT

2700K, 3000K
4000K, 5000K
6500K

Control

ON/OFF
DALI



General Specifications

Twin M DALI/ON-OFF

- With its aluminum extrusion body and tempered glass, it is designed to operate smoothly for many years under harsh environmental conditions.
- It has universal operating voltage of 110/220VAC.
- Control feasibility with the built-in DALI driver option.
- CCT options from 2700K to 6500K.
- It provides visual harmony to architectural structures with its body color options.
- It allows versatile use with its compact structure and high efficiency LEDs.
- It is compatible with various architectural structures with its wide lens options



Technical Specifications

Twin M DALI/ON-OFF

General

Control	DALI or ON-OFF
Color Depth	256

Physical

Size	2 23/64" x 2 61/64"
Body	Aluminum Extrusion
Connections	IP67 Connector
Working Temperature	-13 °F ~ 122°F
Protection Class	IP67

* Product lengths may vary. For details, see the technical drawing section.

Optical

Luminous Flux	(*) 2160lm, 4320lm, 6480lm, 8640lm
Beam Angle	10°, 25°, 45°, 60°, 10°x35°, 10°x60°

* Lumen values are given for Wash X 030, Wash X 060, Wash X 090 and Wash X 120, respectively.

Electrical


Power	(*) 18W, 36W, 54W, 72W
Operating Voltage	110/220VAC

Effective solution for historical building
lighting with shades of white color


Technical Drawing

Twin M DALI/ON-OFF


Twin M 030

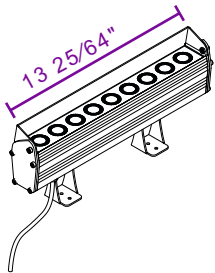


Twin M 060

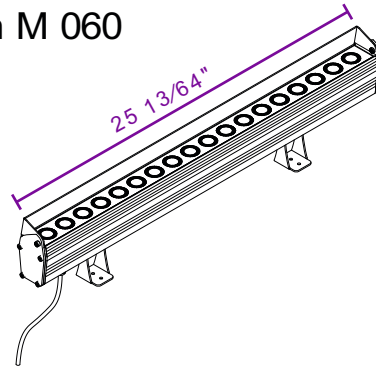


Twin M 090

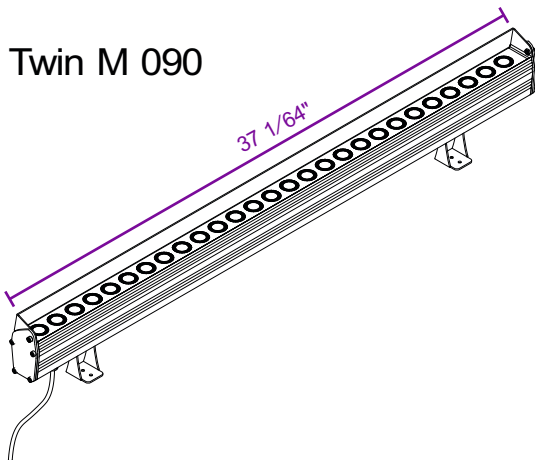


Twin M 120

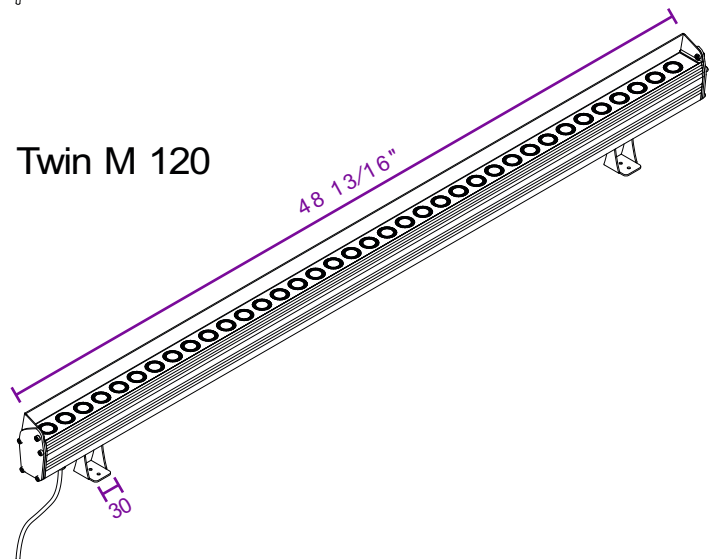

Options

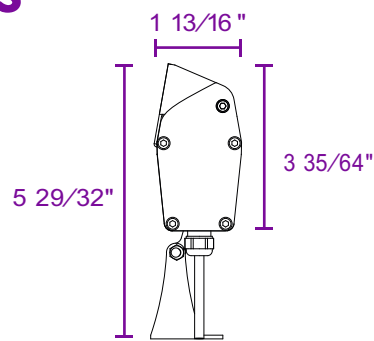

With antiglare

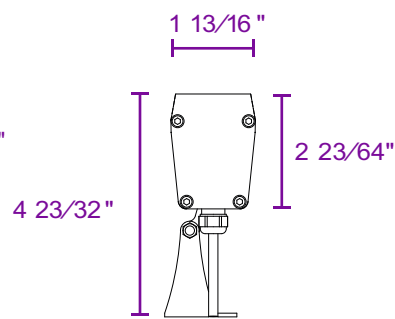

Without antiglare

All dimensions are in inches

Accessories

Twin M DALI/ON-OFF

Connection Accessories



Extension cable



Input cable

Mounting Accessories



Mounting bracket



Socket Pliers



M4 Allen Key

Connection Diagram

Twin X DALI/ON-OFF

